



Glue-Line Rip



Rip to Dimension

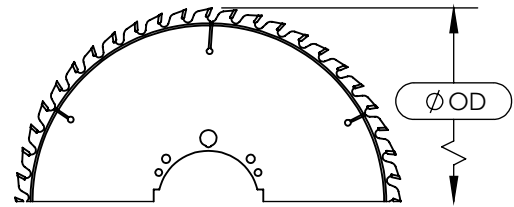

Typical HT (Hub Thickness) 3.00mm

### Technical Specifications

Part	Kerf	OD (Outer Diameter)	Z (# of Teeth)	RD (Rim Depth)	RT (Rim Thickness)	Plate Thickness	Timber Thickness
SPSR-305-036-12-1.70	2.70mm .106"	12"	z36	12mm	1.70mm	2.00mm .079"	5/4" max
SPSR-305-036-12-1.90	2.90mm .114"	12"	z36	12mm	1.90mm	2.00mm .079"	5/4" max
SPSR-305-036-12-2.20	3.20mm .126"	12"	z36	12mm	2.20mm	2.50mm .098"	5/4" max
SPSR-305-036-12-2.50	3.60mm .142"	12"	z36	12mm	2.50mm	2.80mm .110"	5/4" max
SPSR-305-048-12-1.70	2.70mm .106"	12"	z48	12mm	1.70mm	2.00mm .079"	5/4" max
SPSR-305-036-12-1.90	2.90mm .114"	12"	z48	12mm	1.90mm	2.00mm .079"	5/4" max
SPSR-305-036-12-2.20	3.20mm .126"	12"	z48	12mm	2.20mm	2.50mm .098"	5/4" max
SPSR-305-036-12-2.50	3.60mm .142"	12"	z48	12mm	2.50mm	2.80mm .110"	5/4" max

**Relieved Shoulder Rip Saws** feature a shallow rim at the OD which provides added clearance around the tip from just below the gullet to the top of the shoulder for cooler cutting and reduced resin build up.

To help us quote the right blade for you, please [contact](#) one of our knowledgeable sales staff and let us know about your application and what goals you are looking to achieve.

### Bore Pattern Specs

Machine MFG	Ø Bore	Ø Pinhole	Keyway Specs
Weinig	80.00"	(2) 13mm Pinholes on 100mm BC (4) 6.6mm Pinhole son 95mm BC (6) 5.5mm Pinhole son 91mm BC	DKW W:18.5mm X L: 3.5mm

sales@superthinsaws.com