



Glue-Line Rip



Rip to Dimension

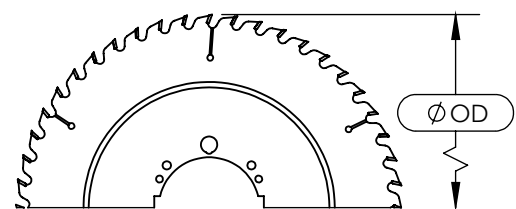

Typical HT(Hub Thickness) 3.00mm

Technical Specifications

Part	Kerf		OD (Outer Diameter)	Z (# of Teeth)	RD (Rim Depth)	RT (Rim Thickness)	Timber Thickness
IF-305-036-40-1.40	2.30mm	.091"	12"	z36	40mm	1.40mm	5/4" Max
IF-305-036-40-1.80	2.70mm	.106"	12"	z36	40mm	1.80mm	5/4" Max
IF-305-036-40-2.10	3.10mm	.122"	12"	z36	40mm	2.10mm	5/4" Max
IF-305-036-55-1.60	2.60mm	.102"	12"	z36	55mm	1.60mm	8/4" Max
IF-305-036-55-2.00	3.00mm	.118"	12"	z36	55mm	2.00mm	8/4" Max
IF-305-048-40-1.40	2.30mm	.091"	12"	z48	40mm	1.40mm	5/4" Max
IF-305-048-40-1.80	2.70mm	.106"	12"	z48	40mm	1.80mm	5/4" Max
IF-305-048-40-2.10	3.10mm	.122"	12"	z48	40mm	2.10mm	5/4" Max
IF-305-048-55-1.60	2.60mm	.102"	12"	z48	55mm	1.60mm	8/4" Max
IF-305-048-55-2.00	3.00mm	.118"	12"	z48	55mm	2.00mm	8/4" Max
IF-305-056-40-1.40	2.30mm	.091"	12"	z56	40mm	1.40mm	5/4" Max
IF-305-056-40-1.80	2.70mm	.106"	12"	z56	40mm	1.80mm	5/4" Max
IF-305-056-40-2.10	3.10mm	.122"	12"	z56	40mm	2.10mm	5/4" Max

Integral Flange Rip Saws are designed with a robust body that provides maximum beam strength and stiffness. This allows the blade to withstand higher cutting forces and faster feed rates. The result is longer and more reliable run times between sharpening with more accurate glue-line cuts.

To help us quote the right blade for you, please [contact](#) one of our knowledgeable sales staff and let us know about your application and what goals you are looking to achieve.

Bore Pattern Specs

Machine MFG	Ø Bore	Ø Pinhole	Keyway Specs
Weinig	80.00mm	(2) 13mm Pinholes on 100mm BC (4) 6.6mm Pinholes on 95mm BC (6) 5.5mm Pinholes on 91mm BC	DKW W:18.5mm x L: 3.5mm

sales@superthinsaws.com