



Glue-Line Rip



Rip to Dimension

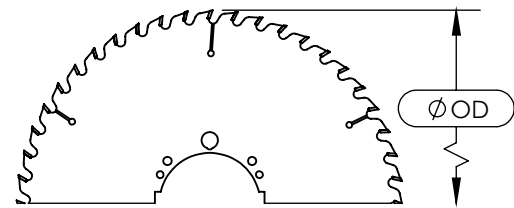

Technical Specifications

Part	Kerf		OD (Outer Diameter)	Z (# of Teeth)	PT (Plate Thickness)	Timber Thickness
SP-305-036-2.20	3.20mm	.126"	12"	z36	2.20mm	5/4" Max
SP-305-036-2.50	3.50mm	.138"	12"	z36	2.50mm	5/4" Max
SP-305-036-2.80	3.90mm	.154"	12"	z36	2.80mm	5/4" Max
SP-305-048-2.20	3.20mm	.126"	12"	z48	2.20mm	5/4" Max
SP-305-048-2.50	3.50mm	.138"	12"	z48	2.50mm	5/4" Max
SP-305-048-2.80	3.90mm	.154"	12"	z48	2.80mm	5/4" Max

Our Straight Plate Rip Saws are built to the tightest tolerances, raising the bar above industry standards for accuracy and performance. Available in both Glue-Line and Rip-to-Dimension varieties, and with a kerf specific to your application.

To help us quote the right blade for you, please [contact](#) one of our knowledgeable sales staff and let us know about your application and what goals you are looking to achieve.

Bore Pattern Specs

Machine MFG	Ø Bore	Ø Pinhole	Keyway Specs
Weinig	80.00mm	(2) 13mm Pinholes on 100mm BC (4) 6.6mm Pinholes on 95mm BC (6) 5.5mm Pinholes on 91mm BC	DKW W:18.5mm x L: 3.5mm

sales@superthinsaws.com